


IP Power 9258 DS

User Manual

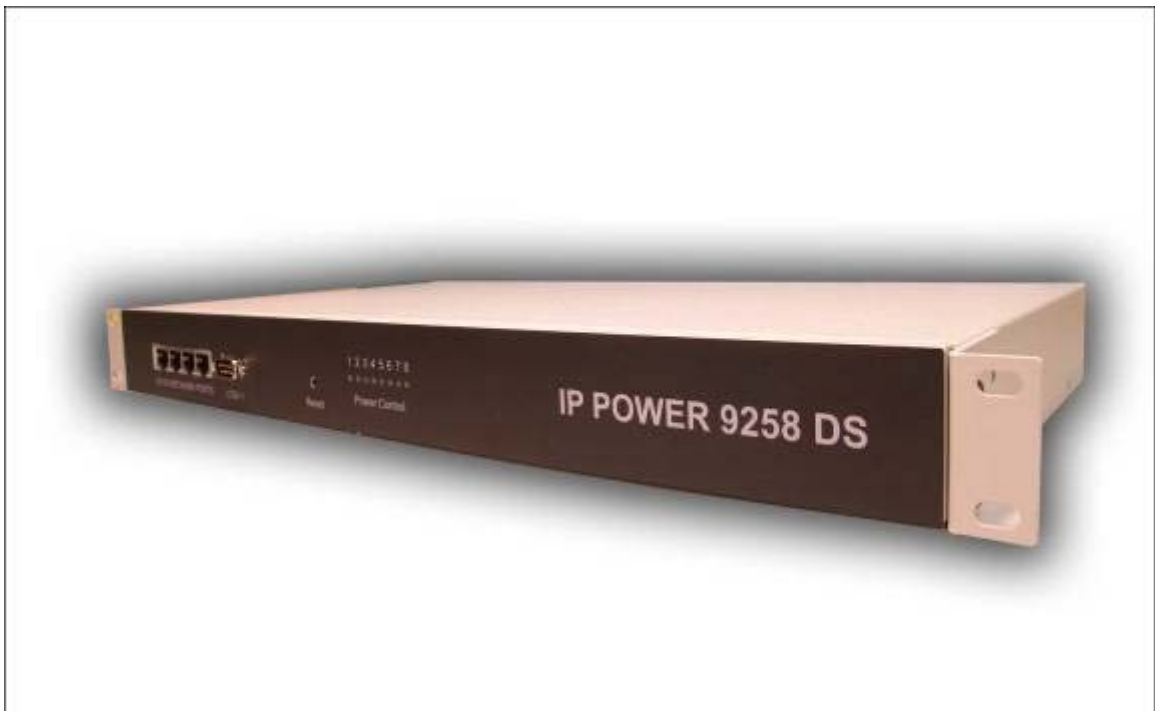

Firmware Version: 4.03
Date Released: 11/09/2012

Warning: Any changes made to this equipment without permission may cause damages to the device!

IMPORTANT NOTICE

1. IP Power 9258 DS was designed for indoor use, we carry no responsibility for possible damages caused by outdoor use, especially in the rain.
2. Please use the power adapter provided by the dealer, we carry no responsibility for the possible damage from using power adapters not .
4. Do not shake the IP Power 9258 DS in any fashion
5. Please contact the dealer If IP Power 9258 DS is not working properly.

Copyright © 2009 All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written consent of us.
All trademarks and products mentioned in this document are the properties of us.

Table of Content

1.) WELCOME	5
INTRODUCTION	5
MINIMUM SYSTEM REQUIREMENTS	5
2.) PRODUCT OVERVIEW	6
FEATURES.....	6
SPECIFICATION	6
PACKAGE CONTENTS	7
3.) INTERFACE DESCRIPTION	8
FRONT VIEW.....	ERROR! BOOKMARK NOT DEFINED.
REAR VIEW.....	9
<i>Rear View</i>	9
4.) QUICK START GUIDE	10
QUICK HARDWARE SETUP	10
QUICK DEVICE SETUP	10
5.) HARDWARE SETUP	11
6.) SOFTWARE SETUP	12
INSTALLING IP POWER SOFTWARE	12
USING IP EDIT	13
IP SERVICE	16
7.) HARDWARE INTERFACE	17
HARDWARE RESET	17
SERIAL PORT CONTROL	17
HOW TO REPLACE FUSE	17
8.) WEB INTERFACE	18
CONNECTION TO YOUR DEVICE	18
THE CONTROL CONSOLE	18
POWER SETUP	19
<i>Power Controls</i>	19
SYSTEM CONFIGURATION	20
<i>System Setup</i>	20
<i>DDNS</i>	21
<i>E-mail</i>	22
<i>Schedule Ports 1-4 & Ports 5-8</i>	23
<i>IP Service</i>	24
<i>Ping</i>	25
<i>Network Wakeup</i>	27
<i>Change Password</i>	27
<i>Firmware Update</i>	27

<i>Time Change</i>	28
9.) CONTROLLING THE DEVICE.....	29
CGI HTTP COMMANDS.....	29
<i>Set Power Command</i>	29
<i>Set Power Delay Command</i>	29
<i>Set Name Command</i>	30
<i>Get Name Command</i>	30
<i>Get Firmware Version Command</i>	30
<i>Get Time Command</i>	30
<i>Set Time Command</i>	31
<i>Set Device Gateway Command</i>	31
<i>Set Device DNS Command</i>	Error! Bookmark not defined.
<i>Turn D HCP ON/OFF</i>	32
<i>View Log Command</i>	32
SERIAL COM (RS-232) CONTROL	33
<i>Com1</i>	33
SNMP	34
<i>Initial Setup:</i>	34
<i>SNMP MIB</i>	35
10.) XML FUNCTIONALITY	37
11.) FREQUENTLY ASKED QUESTIONS (F.A.Q).....	38

1.) Welcome

Introduction

The IP Power 9258 DS is a state of the art Power Distribution Unit (PDU) & Remote Power Control (RPC) system. The 9258 DS can be used for various applications including: **Power Management, Server Management, Internet Controllable Timer, System Integration and much more.**

This device allows you to control up to 8 separate devices via the internet. By using a web browser, you can remotely control the power of the 9258 DS from virtually anywhere.

What makes this device different from other PDU's is that it has a **dual switch design**.

Unlike other PDU or RPC units the 9258 DS is completely safe. The dual switch design cuts off the power and will eliminate any most electrical threats that other systems may have.



Minimum System Requirements

Operating Systems: WINDOWS Operating Systems (IE5.0+SPI) & LINUX

RJ45 LAN & Internet HUB & Switch

Internet (For remote access) or Ethernet Network (Internal Network use) with some type of Internet connection, (i.e. ADSL, Cable, Dial up or any other forms of Internet service)




2.) Product Overview

Features






1. **Dual Switch Design** for extra safety and protection
2. **HUB function** four 4 RJ45 connections
3. **Auto-ping (Watch dog)** Device Auto Restart / Reboot.
4. Supports: RJ45(HUB), TCP/IP, Http API, Web Server, SMTP Server, SNMP & TRAP, DHCP, DDNS, CNT, XML
5. 8 Power control output
6. 2 Main power inputs.
7. 1 RS232 port for System Integration.
8. Design Pressure System: Prevent interference with power noise design. (Second stage isolation)
9. Scheduler System for date sensitive control
10. Http commands through Internet
11. Log Capability
12. CNT Technology: No Port Forwarding Needed in Router – Just Plug & Play
13. IP Service: Easily Find your device on the internet without having to remember complicated IP's
14. Light Aluminum Design
15. Supports UPNP (Universal Plug & Play)

Specification

1. Input Power Voltage: 90-240 VAC
2. Input Frequency: 50/60 Hz full range
3. Dimension: 440x235x40 mm 1.8kg
4. Reliability testing Certification MBTF 200,000 hrs +
5. Operating temperature range: 0 - 50 degrees Celsius.

Package Contents			
1.) 9258 DS Unit x 1			
2.) 9258 DS Installation CD			
3.) Extra Fuse x 1: Located in the power input of the 9258 DS <i>Refer to installing fuse section</i>			
4.) RJ45 Cable x 1 (Optional)			
5.) Input Power Cable x 2 (Optional)			

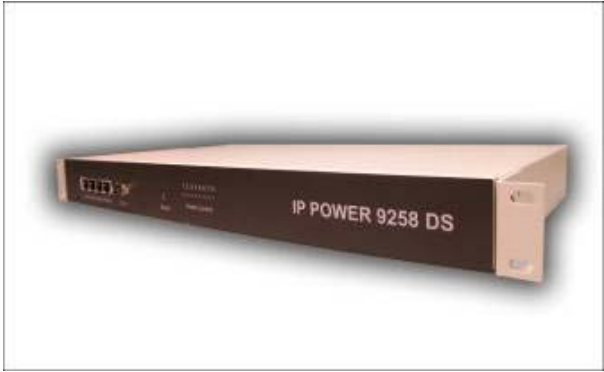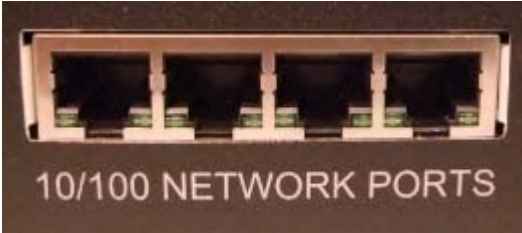3.) Interface Description

<p>Front View</p>	
<p>4 Port Ethernet Hub: Connect up to 4 separate devices with the built in hub.</p>	
<p>1 Serial Ports: Serial Port 1: Regular Speed</p>	
<p>Reset Button: To reset to original manufacture settings, hold down the reset button with a pen or a pin for 15 seconds until will hear a long beep sound.</p>	
<p>Power Status Indicator: The Power Status indicator</p>	

Rear View

Rear View



Rear View

8 Output Power Ports:

Connect up to 8 separate devices that will be controlled by the 9258 DS. Ports 1-4



2 Input Power Ports:

The input power sends power to the 2 sets of 9258.




2 Power Switch:

The 2 Power switch turns on the input power
Ports 1-4: Switch 1
Ports 5-8 Switch 2



Replaceable Fuse: The 9258 uses a
TYPE : U/C GFE 10A 250V (PF)



4.) Quick Start Guide

Quick Hardware Setup

*Before you plug in the device make sure you have the appropriate input plugs.

* For **220-250V**, please use power cable that can support 10A current.
Max Output Current: (total of each four outlets) 10A, (each outlet) 6A.

* For **100-120V**, please use **power cable that can support 15A current**.
Max Output Current: (total of each four outlets) 15A, (each outlet) 6A

- 1.) Make sure that all the package contents are included, if anything is missing please contact the store.
- 2.) Plug the RJ45 (Ethernet Cable) from your router or modem to any of the 4 ports on the 9258 DS.
- 3.) Plug in the Input Power Plugs into the device and then into the wall of your device.
- 4.) Plug in the devices that you want to control in the output ports of the 9258 DS

Quick Device Setup

Using IPedit



- 1.) Click on the REF button, and wait a few seconds. IPedit will automatically detect the network settings and setup the device.
- 2.) Once settings have been detected hit the apply button to apply the new settings.

The REF Setting dialog box contains the following fields and buttons:

REF Setting	
Name	IPCam_9070
Gateway	192.168.100.1
IP Address	192.168.100.2
Netmask	255.255.255.0
APPLY CANCEL	

- 3.) Hit yes to confirm and Enter the login and password for the Device to Approve changes


The REF confirmation dialog box has the following elements:

REF	
Yes / No !!	
	Cancel

The User Name & Password dialog box contains the following fields and buttons:

User Name & Password	
User Name :	admin
Password :	*****
	Cancel

4.) Then hit the rescan button on IPEdit to confirm the changes have been made.

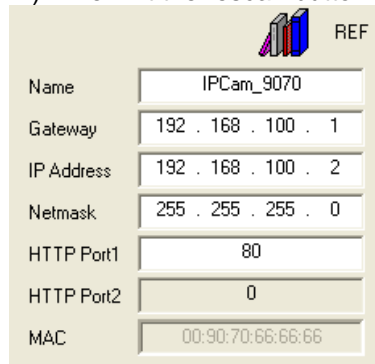

Name	IPCam_9070
Gateway	192 . 168 . 100 . 1
IP Address	192 . 168 . 100 . 2
Netmask	255 . 255 . 255 . 0
HTTP Port1	80
HTTP Port2	0
MAC	00:90:70:66:66:66

- 5.) Once you have found your device double click on the device and the internet explorer will pop up and ask for your login information.
- 6.) Type in your password & login and the device is ready to use.

*** Remember that to access your device from the outside network, you will need to port forward the IP Address of your device.**

5.) Hardware Setup

- 1.) Connect the IP Power 9258 DS to a HUB or Router with a RJ45 network cable.
- 2.) Connect the HUB or Router to the internet (May through ADSL/XDSL modem).
- 3.) Connect the power adapter to the IP Power 9258 DS.
- 4.) Connect the power adapters of under control electric equipment to corresponding out port of IP Power 9258-Pro.

Turn on your computer and the power adapter of IP Power 9258-Pro

* For **220-250V**, please use power cable that can support 10A current.
Max. output current: (total of each four outlets) 10A, (each outlet) 6A.

* For **100-120V**, please use **power cable that can support 15A current**.
Max. Output current: (total of each four outlets) 15A, (each outlet) 6A

6.) Software Setup

The software for the device is located on the **Media Link-IP Family CD** that came with the device. IP Power Pack is located on the main page of the CD. Please follow the directions carefully and install the necessary files


The IP Power Necessary Software:

* **IPedit** : For search our IP product , access, modify basic configurations of IP POWER 9258DS.

* **IP POWER Center** : Own software for CNT and multiple IP power to control in one software .

Installing IP Power Software

- 1.) First place the **Media Link-IP Family CD** that came with your device into your CD/DVD Rom drive. The CD should auto run but if it does not go to the CD/DVD Rom drive and select the file "autorun.html".

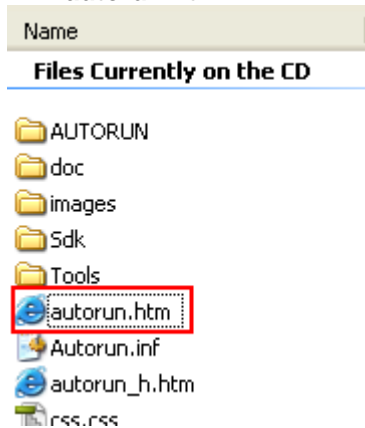

- 2.) Once the CD has started, go to the IP Power section and click and install the **following**:

IPedit:

IP Family Program used to search, access, modify basic configurations of IP Family products.

IP Power Center:

Multiple IP Power device manager to control the ON and OFF of the managed devices. (For IP Power 9258 Ping , 9280, 9211, 9222.)

- 3.) Once installation is complete please double click the **IPedit** to configure and search for your device.


Using IP Edit

IPEdit is a search tool designed to setup and access the device.


It comes with the IP Service feature which searches for the device easily without having to remember long complicated IP addresses. Instead, this technology allows the user to use a name method to find his or her device through the internet. .

Please make sure you have the most updated version of IPEdit. Contact your distributor to provide you with the newest updated IPEdit.

- 1.) After correctly installing the IPEdit software, double click on the IPEdit icon to run the program.

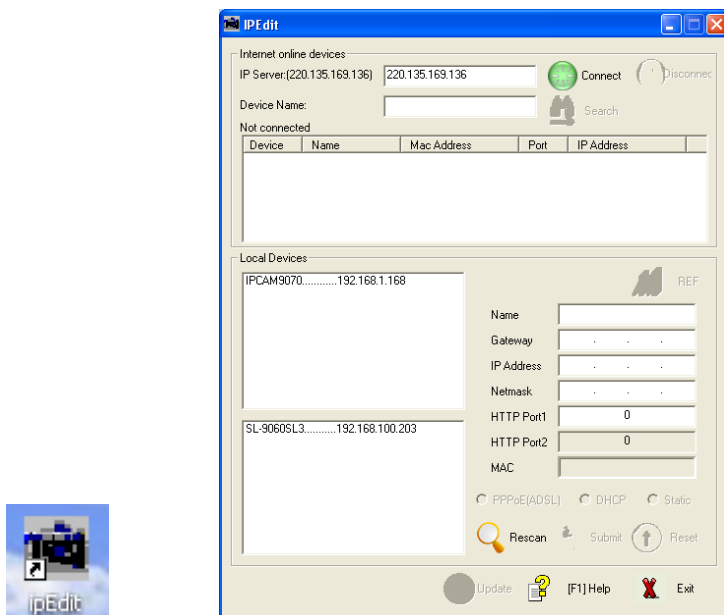


- 2.) Open IPEdit and any device in the same network should automatically be detected and listed in the **local devices sections**. ***The devices will need to be setup correctly through IPEdit so that you can properly access the device.***

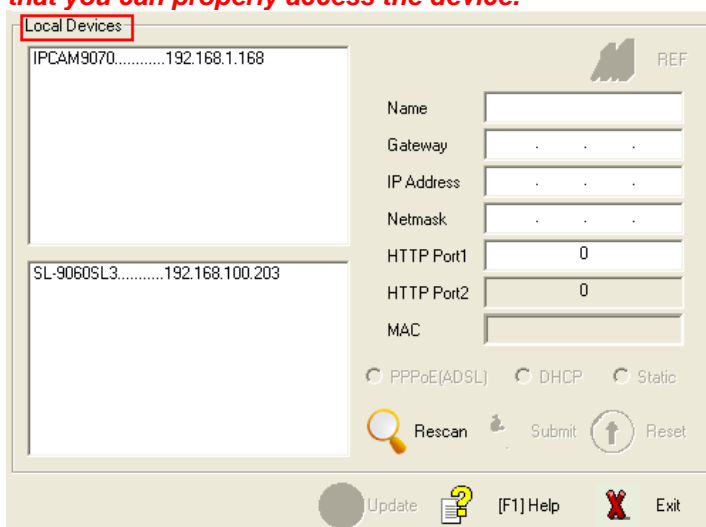


3.) Setup the Device:

All devices will need to be on the same network if not the device cannot be accessed and will not be detected.

a. Quick Easy Setup (Recommended)

- 7.) Click on the REF button,  and wait a few seconds. IPedit will automatically detect the network settings and setup the device.
- 8.) Once settings have been detected hit the apply button to apply the new settings.

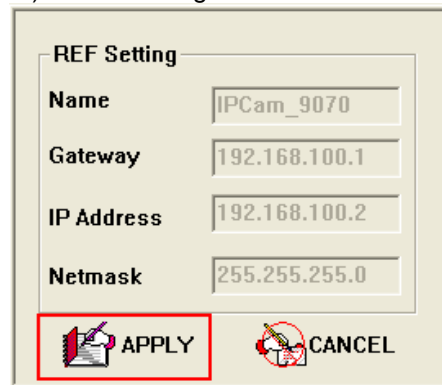


The REF Setting dialog box contains the following fields:


REF Setting	
Name	IPCam_9070
Gateway	192.168.100.1
IP Address	192.168.100.2
Netmask	255.255.255.0

At the bottom, there are two buttons: **APPLY** (with a document icon) and **CANCEL** (with a red X icon). The APPLY button is highlighted with a red rectangle.

- 9.) Hit yes to confirm and Enter the login and password for the Device to Approve changes

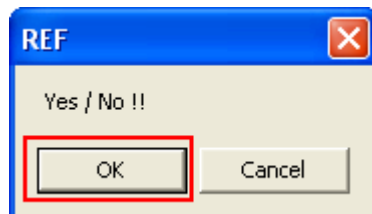

The REF dialog box shows a confirmation prompt: "Yes / No !!". Below the prompt are two buttons: **OK** and **Cancel**. The OK button is highlighted with a red rectangle.

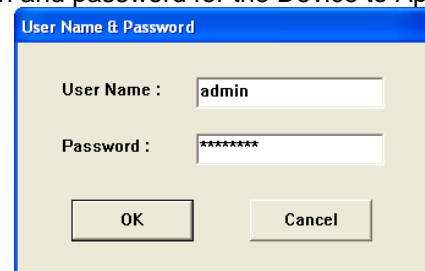


The User Name & Password dialog box contains the following fields:

User Name & Password	
User Name :	admin
Password :	*****

At the bottom, there are two buttons: **OK** and **Cancel**.

- 10.) Then hit the rescan button on IPedit to confirm the changes have been made.

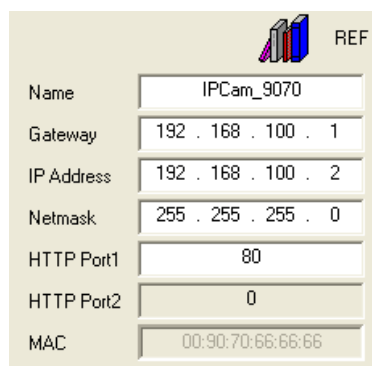


The IPedit main window displays the following information:


REF	
Name	IPCam_9070
Gateway	192 . 168 . 100 . 1
IP Address	192 . 168 . 100 . 2
Netmask	255 . 255 . 255 . 0
HTTP Port1	80
HTTP Port2	0
MAC	00:90:70:66:66:66

b. Custom Setup (Advance Users)

- 1.) Highlight the device on the local devices section and on the right side of IPedit all network information on the device will be displayed.

If the device is not on the same network a Red Exclamation mark  will appear in the IP Network information section

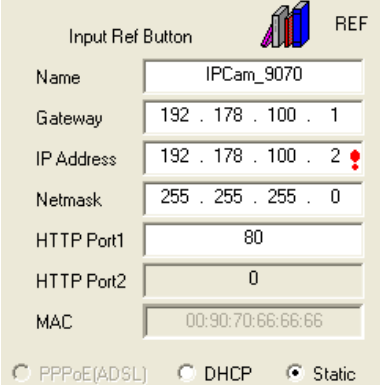


Input Ref Button	
Name	IPCam_9070
Gateway	192 . 178 . 100 . 1
IP Address	192 . 178 . 100 . 2 
Netmask	255 . 255 . 255 . 0
HTTP Port1	80
HTTP Port2	0
MAC	00:90:70:66:66:66

☐ PPPoE(ADSL) ☐ DHCP ☒ Static

2.) To setup the device, type in the correct **Gateway** and **IP Address**.

* **Gateway Address:** The gateway address can be obtained in Windows under the network connections page

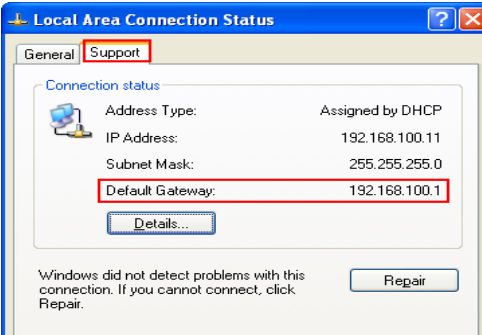

Local Area Connection Status

General Support

Connection status

Address Type: Assigned by DHCP

IP Address: 192.168.100.11

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.100.1


Details...

Windows did not detect problems with this connection. If you cannot connect, click Repair.

Repair

* **IP Address:** Make sure the first 3 sections of the IP Address matches the gateway address.
Example: Gateway Address – 192.168.1.1 IP Address – 192.168.1.xxx

3.) Once the Default Gateway information has been obtained, enter the correct information into IPEdit and hit the submit button.

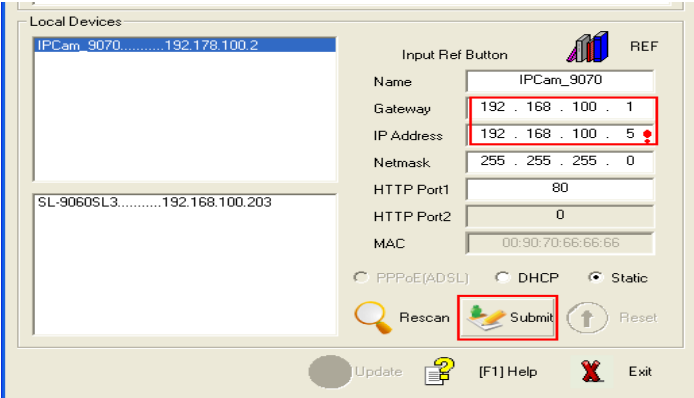

Local Devices


IPCam_9070.....192.178.100.2

SL-9060SL3.....192.168.100.203

Input Ref Button

Name IPCam_9070

Gateway 192 . 168 . 100 . 1

IP Address 192 . 168 . 100 . 5 

Netmask 255 . 255 . 255 . 0

HTTP Port1 80

HTTP Port2 0

MAC 00:90:70:66:66:66

☐ PPPoE(ADSL) ☐ DHCP ☒ Static

Rescan Submit Reset

Update [F1] Help Exit

4.) Then hit the rescan button on IPEdit to confirm the changes have been made


IP Service

How to use IP Service on IPEdit:

IP service allows the user to directly connect to his / her device through the internet without having to remember long confusing IP Address. Instead with this IP Service Technology, the user only has to remember the name of the device that the user has selected. Then the user can connect to IP Service, type in the device name, and connect directly to the device.

First if you have de-activated IP Service on your device make sure you re-enable it. (Refer to your manual if you have questions on How to activate IP Service)

- 1.) Open IPEdit, the device will show up in the Local Device Section. If you have not selected a name for the device, please refer to the section on the manual labeled: "Naming your device".
- 2.) To start IP Service, **Hit the green connect button on the top of IPEdit.**

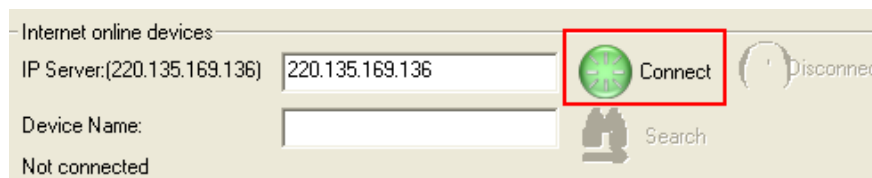

- 3.) Once you have been connected search for your device by typing in at least the first 3 letters that you named your device with. Then hit the search button.
- 4.) Double click on your device and a Internet Explorer window will appear connecting directly to your device.

***Remember:** It is crucial to have the IP Address of the device port forwarded from the router that you are using so you can connect to your device from anywhere. Please refer to your routers user manual on how to port forward your device.

7.) Hardware Interface

Hardware Reset

To reset the device back to manufacturer default, use a small pen or pin and press the reset button and hold for a minimum of 10 seconds. Once you hear a “**beep**” sound the device will be reset.

Serial Port Control

Please view the Controlling the Device section on this manual on page 31.

How to Replace Fuse

1.) The fuse is located between the power switch and the power input plugs.




2.) Carefully remove the fuse holder with a flat screwdriver.



3.) The fuse can be purchased at most electrical stores

Model: U/C GFE 10A 250V (PF)



8.) Web Interface

Connection to your Device

Once you have the 9258 DS setup correctly.

Open IPedit and double click on your IP Power 9258 DS.

A Internet Explorer browser screen pop up with the login screen for the 9258 DS.



The image shows a web browser window displaying the login screen for the IP 9258 DS. At the top, there is a logo with the text 'IP POWER' in a stylized font. Below the logo, the title 'IP 9258 DS Login' is displayed in blue. The main content area has a light gray background and contains the text 'Please enter user name and password.' followed by two input fields: 'User Name:' with the value 'admin' and 'Password:' with a masked password '*****'. At the bottom of the form are two buttons: 'OK' and 'Cancel'.


Default IP: 192.168.1.100 (When 9258 DS is connected to PC directly)

Default Login: Admin

Default Password: 12345678

The Control Console

The Right Panel of the Web Interface controls the functionality and setup of the IP Power 9258 DS.

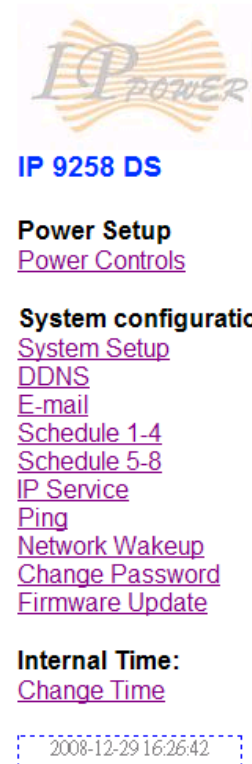

The image shows the 'IP 9258 DS' control console. At the top, there is a logo with the text 'IP POWER' in a stylized font. Below the logo, the title 'IP 9258 DS' is displayed in blue. The main content area has a light gray background and contains several sections of links. The first section is 'Power Setup' with a link to 'Power Controls'. The second section is 'System configuration' with links to 'System Setup', 'DDNS', 'E-mail', 'Schedule 1-4', 'Schedule 5-8', 'IP Service', 'Ping', 'Network Wakeup', 'Change Password', and 'Firmware Update'. The third section is 'Internal Time:' with a link to 'Change Time'. At the bottom, there is a dashed box containing the timestamp '2008-12-29 16:26:42'.

Power Setup

Power Controls

The Power Controls setting allows you to control the devices that are connected to the 9258 DS.

Outlet	Name	Control	Timer Controls
Power 1		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 2		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 3		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 4		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 5		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 6		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 7		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 8		<input checked="" type="radio"/> On <input type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off

Name: The name field allows you to enter a name of the Power that you are controlling. Simple type in the name of the device next to the outlet that it is connected to, then hit apply.

Outlet	Name	Control	Timer Controls
Power 1	Sample Device	<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 2		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 3		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off

Control: Control allows the user to actively control the device on each port. To turn off or turn on the device, select the control you want then hit the apply button

Timer: The timer allows you to turn On or Off your device with a delay. Please view the example below:

Outlet	Name	Control	Timer Controls
Power 1	Timer Delay-Off	<input type="radio"/> On <input checked="" type="radio"/> Off	5 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off
Power 2	Timer Delay-On	<input type="radio"/> On <input checked="" type="radio"/> Off	10 <input type="text"/> Sec <input checked="" type="radio"/> On <input type="radio"/> Off
Power 3		<input type="radio"/> On <input checked="" type="radio"/> Off	0 <input type="text"/> Sec <input type="radio"/> On <input checked="" type="radio"/> Off

Power 1: The device will turn on when you hit the apply button and after 5 seconds the device will be turned off.

Power 2: The device will be off and when you hit apply after 10 seconds then the device will turn on.

System Configuration

System Setup

The System Setup page is where you would configure the basic IP information needed for the device to work properly

Please restart for any changes to take effect.	
IP Address:	192 . 168 . 1 . 88 : 80
Subnet Mask:	255 . 255 . 255 . 0
Default Gateway:	192 . 168 . 1 . 1
DNS:	168 . 95 . 192 . 1
DHCP Client	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
BEEPER	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Http Command Verification	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Device Name:	IP9258DS
Release Version:	V1.025 2008/12/31
<input type="button" value="Submit"/> <input type="button" value="Cancel"/>	

IP Address: The IP Address of the 9258 DS can be specified here. If you are using a hub or router, the IP address may be selected for you already. Otherwise you can manually select the IP Address here.

Subnet Mask: The Subnet Mask Address of the 9258 DS can be specified here. If you are using a hub or router, the IP address may be selected for you already. Otherwise you can manually select the IP Address here.

Default Gateway: The Default Gateway is given by a router or hub and this is where that information would be specified.

DNS: The DNS is the Domain Name Server. This information can be obtained by contacting the ISP

DHCP Client: The DHCP client allows the 9258 DS to use DHCP to obtain the IP Information from a Hub or Router.

Beeper: The Beeper turns on/off the beeper sound from the 9258 DS. When commands are sent a beep sound will appear

Http Command Verification: The HTTP Verification turns on or off the HTTP Command mode. This mode allows you to send commands directly to the device via internet without having to enter the device.

Device Name: In this section you can change the name of the 9258 DS for easier identification purposes. It is also a way to find your device using IP Service.

Release Version: Displays information on the Firmware version and release date.

DDNS

The DDNS section allows you to setup the 9258 DS with a DDNS server (i.e. www.dyndns.com). The the server has been setup correctly, enter the necessary information into the 9258 DS DDNS settings.

DDNS SETUP	
DDNS Server IP:	<input type="text" value="63.208.196.96:80"/>
Your Domain:	<input type="text" value="sample.dyndns.info"/>
DDNS UserName:	<input type="text" value="sample"/>
DDNS Password:	<input type="password" value="••••••••"/>
Enable DDNS:	<input type="text" value="TRUE"/> ▼
Proxy Enable:	<input type="text" value="FALSE"/> ▼
Proxy IP:	<input type="text"/>
Proxy Port:	<input type="text" value="0"/>
<input type="button" value="SAVE"/> <input type="button" value="UPDATE NOW"/>	

DDNS Server IP: Input IP Address of the DDNS server.

Your Domain: Type in the Domain Name that you selected for your DDNS server

DDNS Username: Enter the DDNS Username

DDNS Password: Enter the corresponding Password for your DDNS account

Enable DDNS: Select Enable or Disable to turn on or off DDNS settings for the 9258 DS

Proxy Enable: Select enable or disable if any proxy servers are used.

Proxy IP: Enter the proxy server IP Address of the proxy server here.

Proxy Port: Enter Port of the proxy server

E-mail

The 9258 DS has an e-mail function that can be used in various scenarios and conditions. When a power port is activated or deactivated, the device will send an email.

When the scheduler is used the device will also send emails when ports are activated or deactivated.

To send out mail successfully , please do set the DNS correctly . You can check with your ISP for correct DNS information.

E-mail settings	
Smtp Server:	<input type="text" value="sample.com"/>
Smtp Port:	<input type="text" value="25"/>
Pop 3 Server:	<input type="text" value="sample.com"/>
Username:	<input type="text" value="login@sample.com"/>
Password:	<input type="password" value="••••••••"/>
Sender:	<input type="text" value="login@sample.com"/>
Receiver 1:	<input type="text" value="receiver@sample.com.tw"/>
Receiver 2:	<input type="text"/>
Receiver 3:	<input type="text"/>
Subject:	<input type="text" value="subject 9258 PRO"/>
Mail Body:	<input type="text" value="mailbody 9258 PRO"/>
<div>Save Send</div>	

Smtp Server: Input the server name of the mail server.

Smtp Port: Input the outgoing Server Port

Pop 3 Server: Input the incoming pop 3 server information

Username: Enter E-mail username

Password: Enter E-mail password (no longer than 8 characters.)

Sender: Enter Sender Email Address

Receiver 1-3: Enter up to 3 receivers

Subject: Enter the email Subject line

Mail Body: Enter Email Body information.

Schedule Ports 1-4 & Ports 5-8

The scheduler function allows you automatically control the device(s) without having to login. This function allows you to turn on or turn off, cycle power of your devices at scheduled times. To use the this function some key parameters must be set correctly.

Power

Power	Date			Time			Frequency	Power ON/OFF
Power 1A	2008	-	11	-	30		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 1B	2008	-	11	-	30		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF
Power 2A	2008	-	11	-	30		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 2B	2008	-	11	-	30		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF
Power 3A	2008	-	11	-	30		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 3B	2008	-	11	-	30		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF
Power 4A	2008	-	11	-	30		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 4B	2008	-	11	-	30		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF

Power	Date			Time			Frequency	Power ON/OFF
Power 5A	2008	-	11	-	19		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 5B	2008	-	11	-	19		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF
Power 6A	2008	-	11	-	19		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 6A	2008	-	11	-	19		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF
Power 7A	2008	-	11	-	19		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 7B	2008	-	11	-	19		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF
Power 8A	2008	-	11	-	19		Weekend ▾	<input checked="" type="radio"/> ON <input type="radio"/> OFF
Power 8B	2008	-	11	-	19		Weekend ▾	<input type="radio"/> ON <input checked="" type="radio"/> OFF

Date: Input the date for the device to activate power controls. **Format:** (YYYY-MM-DD)

Time: Enter the exact time of when the device will be activated on. Format: (HH:MM:SS)

Note: Hour is based on a 24hr military time.

Frequency: Select the number of times this event will be activated (Disable, Just Once, Everyday, Workdays, Weekend)

Disable: Disables the scheduler

Just Once: Activates the schedule only once

Everyday: Activates everyday until schedule has been deactivated


Workdays: Activates every week from Monday – Friday until deactivated

Weekend: Activates every week on Saturday & Sunday until deactivated

Power On / Off: Set the power to On or Off when the scheduler is activated

IP Service

The IP Service functionality allows your 9258 DS to easily be found on the internet by using IP Service. This function allows you to search for your device on IPEdit without having to remember long IP Addresses. Instead all you need is the name of your 9258 DS and you can access it there. ***Refer to Page 13 of the manual on how to use IP Service***

IP Service	
ON/OFF:	OFF 
Server Address	220 . 135 . 169 . 136
<div>Save Cancel</div>	

On / Off: This allows you to turn on or off IPEdit. By default this function is enabled

Server Address: The IP Service Server address by default is **220.135.169.136**. *Please contact your distributor for information on how to setup your own IP Service*

***Note:** To use IP Service Make sure that you have port forwarded the IP Address of the 9258 DS. IF not you will not be able to access your device.

Ping

The Auto-ping functionality allows the 9258 DS to check if the device have malfunctioned or needs to be restarted. If the device is no working correctly the 9258 Ping will activate the action that you have selected to reinstate the state of the device

Outlet	Enable	Ping Address	Ping Failures	Action Delay (Sec)	Startup Delay (Sec)	Startup Action	Action
Power1	DISABLE <input type="button" value="v"/>	www.google.co.kr	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>
Power2	DISABLE <input type="button" value="v"/>	www.pchome.com.tw	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>
Power3	DISABLE <input type="button" value="v"/>	www.google.com	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>
Power4	DISABLE <input type="button" value="v"/>	www.hinet.net	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>
Power5	DISABLE <input type="button" value="v"/>	www.seed.net.tw	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>
Power6	DISABLE <input type="button" value="v"/>	www.aviosys.cn	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>
Power7	DISABLE <input type="button" value="v"/>	www.aviosys.com	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>
Power8	DISABLE <input type="button" value="v"/>	www.nba.com	3 <input type="text"/>	3 <input type="text"/>	3 <input type="text"/>	Continue <input type="button" value="v"/>	Reset <input type="button" value="v"/>

Ping Interval & Response Settings	
Ping Time Interval	3 <input type="text"/> Seconds (<i>Time between each Ping</i>)
Ping Response Time	3000 <input type="text"/> Millisecond (<i>Waiting time for a ping response</i>)
<input type="button" value="Submit"/>	

Outlet: A description of which on let to use Ping function

Enable: Disable or Enable ping settings

Ping Address: Specify the IP Address to Ping

Ping Failures: The number of ping failures before the Action is activated.

Action Delay (Seconds): When Ping Failures is reached the number of seconds delay before action is activated.

(I.E some systems or computers that require a shut down time)

Startup Delay (Seconds): The number of seconds it takes the attached devices to startup. Once those devices start, the Start up Action will be activated to **continue pinging or stop pinging**.

Start up Action: After start up Delay has been reached the start up action will either **Continue Pinging or Stop Pinging**

Action: When the number of Ping Failures have been reached. The 9258 will either

Ping Time Interval (Seconds): The number of seconds between each ping

Ping Response Time (Milliseconds): The number of milliseconds the device will wait for a response from the pinged device if no ping is detected within this time it will be considered a ping failure.

Please view the example below for more details:

	1.)	2.)	4.)	5.)	7.)	8.)	6.)
Outlet	Enable	Ping Address	Ping Failures	Action Delay (Sec)	Startup Delay (Sec)	Startup Action	Action
Power1	ENABLE	www.sample.com	3	3	3	Continue	Reset
Power2	DISABLE	www.aviosys.com	3	3	3	Continue	Reset
Power3	DISABLE	www.yahoo.com	3	3	3	Continue	Reset
Power4	DISABLE	www.google.com	3	3	3	Continue	Reset
Power5	DISABLE	192.168.1.53	3	3	3	Continue	Reset
Power6	DISABLE	www.aviosys.cn	3	3	3	Continue	Reset
Power7	DISABLE	www.aviosys.com	3	3	3	Continue	Reset
Power8	DISABLE	www.sample2.com	3	3	3	Continue	Reset
Ping Interval & Response Settings							
Ping Time Interval	3	Seconds (Time between each Ping)					
Ping Response Time	3000	Millisecond (Waiting time for a ping response)					
Submit							

In the picture above:

1. **Power1 Ping** function is **enabled**
2. The 9258 DS will ping the web address www.sample.com
3. If there is a response within the **Ping Response Time** the 9258 DS will send another ping signal the set **Ping Time Interval** which is 3 seconds for this example.
4. If the 9258 DS does not receive a response from the device it will constitute a **Ping Failure**.
5. After 3 consecutive failure the device will go to the **Action Delay** section. In this case the device will delay for 3 seconds.
6. When action delay has been reached the **Action** will be set off. Here we have set the 9258 DS to **Reset** the device.
7. Once the device has been reset the 9258 will go into **Startup Delay** mode. In this case it is 3 seconds.
8. After the startup delay mode has been reached the 9258 will check the **Startup Action** whether to continue or stop pinging the device. Here we have it set to Continue.

Then the process starts all over.

Network Wakeup

The network wakeup function is used to boot up a computer that has the Wake on Lan functionality. Just enter the MAC address of the target computer and the 9258 DS will be able to turn on the device.

Network Wakeup	
MAC:	<input type="text" value="00055D7C0B82"/>
<div>Save Send</div>	

Change Password

The change password page allows you to change your password for the 9258 DS. To change the password:

Please Enter the Following	
Old Password:	<input type="password" value="....."/>
New Password:	<input type="password" value="....."/>
Confirm New Password:	<input type="password" value="....."/>
<div>Submit</div>	

- 5.) Enter the current password.
- 6.) Type in the New Password
- 7.) Confirm New Password

Firmware Update

Follow the instructions carefully and update with caution.

- 1.) Click the update Button.

Firmware Update

Instructions

1.) Please wait a few seconds for the confirmation page to load.
2.) Hit the continue button to continue to the update page
3.) Select the correct firmware, Hit the upgrade button and the system will reboot automatically.
4.) Then re-login to make sure that the firmware update was successfully completed.

Update Cancel

- 2.) Wait for the continue button to load properly. Then hit the continue button.

Please waiting a minute,
and click button to next step.

Continue

- 3.) Once you have clicked continue the 9258 DS will take you to the update page.
- 4.) Browse for the update file
- 5.) Hit the update button and wait for as least 1 minute for the upgrade to complete.

Upgrade Firmware

Please select a file (~.bin) to upgrade: Browse... Upgrade

Upgrading firmware may take 60 seconds
Upgrade must NOT be interrupted !

Time Change

The change time feature allows you to change time of your device by setting the time or selecting a NTP server.

Date / Time (yyyy-mm-dd HH:MM:SS):

2008 . 12 . 15 13 : 11 : 38

NTP Server IP Address:

192 . 43 . 244 . 18 TimeZone: 8

SAVE NTP

Set Date and Time

To set the time of the device enter the Date/ Time with
Date: YYYY-MM-DD **Time:** 24HH-MM-SS

NTP Server

The NTP Server allows the 9258 DS to check with a NTP (Network Time Protocol) to constantly keep the internal clock of the device updated. The network environment must connect to Internet.

9.) Controlling the Device

CGI HTTP Commands

CGI Commands allow you to easily integrate the 9258 DS with other systems and programs. Please read the instructions carefully on how to use the Http:// Commands

To use http:// Commands open up a web browser and type in the command that you would like to use.

The command structure looks like this

<http://xxx.xxx.x.xxx/set.cmd?user=USER+pass=PASSWORD+cmd=COMMAND>

Set Power Command

Command

<http://IP/set.cmd?cmd=setpower+p6x=y+p6x=y+p6x=y+p6x=y+p6x=y+p6x=y+p6x=y+p6x=y>

x = 1~8 means output number

y = 1/ 0 means power on/off . 1 means power ON , 0 means power off

Example :

<http://IP/set.cmd?cmd=setpower+p61=0+p62=1+p63=0+p64=1+p65=0+p66=+p67=0+p68=>

means turn OFF of output 1,3,5&7

means turn ON of output 2,4,6&8

Set Power Delay Command

Command

<http://IP/set.cmd?cmd=setpower+p6x=y+p6xn=0+t6x=A>

x = 1~8 means output number

y = 1/ 0 means power on/off . 1 means power ON , 0 means power off

A = 1~9999 means delay second .

Example :

Turn Output #1 as power on and then turn off after 30 seconds

<http://192.168.1.123/set.cmd?cmd=setpower+p61=1+p61n=0+t61=30>

Set Name Command

Command:

setportn+ch=**Port Number**+portn=**Name of Port**

<http://xxx.xxx.x.xxx/set.cmd?user=admin+pass=12345678+cmd=setportn+ch= Port Number+portn= Name of Port>

Example:

<http://192.168.1.39/set.cmd?user=admin+pass=12345678+cmd=setportn+Ch=1+portn=test1>

Response Message: Port1Name_Set_Ok

Get Name Command

Command:

getportn+ch=Port Number+portn=Name of Port

Format: <http://xxx.xxx.x.xxx/set.cmd?user=admin+pass=12345678+cmd=getportn+ch=Port Number+portn=Name of Port>

Example:

<http://192.168.1.39/set.cmd?user=admin+pass=12345678+cmd=getportn+ch=1+portn>

Response Message: Port1Name:test1

Get Firmware Version Command

Command:

GetVersion

Format:

<http://xxx.xxx.x.xxx/set.cmd?user=admin+pass=12345678+cmd=getversion>

Example:

<http://192.168.1.42/set.cmd?user=admin+pass=12345678+cmd=getversion>

Response Message: Version:V1.025

Get Time Command

Command:

getsysclock

Format:

<http://xxx.xxx.x.xxx/set.cmd?user=admin+pass=12345678+smd=getsysclock>

Example:

<http://192.168.1.9/set.cmd?user=admin+pass=12345678+cmd=getsysclock>

Response Message: YR:2008 MO:01 DATE:05 HR:11 MN:38 SEC:42

Set Time Command

Command:

setsysclock+y=YYYY+m=MM+d=DD+h=HH+m=MM+s=SS

Date Parameters

y=Year in YYYY format

m=Month in MM format

d=Day in DD format

Time Parameter

h=Hour in HH (24 hour Military Format)

m=Minutes in MM format

s=Seconds in SS format

Format:

<http://192.168.1.100/set.cmd?user=admin+pass=12345678+cmd=setsysclock+y=YYYY+m=MM+d=DD+h=HH+m=MM+s=SS>

Example:

<http://192.168.1.100/set.cmd?user=admin+pass=12345678+cmd=setsysclock+y=2008+m=7+d=30+h=15+m=44+s=55>

Response Message: YR:2008 MO:07 DATE:30 HR:15 MN:44 SEC:55

Set Device Gateway Command

Command:

setfactory+gateway=xxx.xxx.x.xxx+confirm=factoryonly

Format:

<http://192.168.1.100/set.cmd?user=admin+pass=12345678+cmd=setfactory+gateway=xxx.xxx.x.xxx+confirm=factoryonly>

Example:

<http://192.168.1.100/set.cmd?user=admin+pass=12345678+cmd=setfactory+gateway=192.168.1.1+confirm=factoryonly>

Response Message: Gateway: 192.168.1.1

Turn D HCP ON/OFF

Command:

setfactory+dhcp=x+confirm=factoryonly

Format:

[http://xxx.xxx.xxx/set.cmd?user=admin+pass=12345678+cmd=setfactory+dhcp=\(0=off1=on\)+confirm=factoryonly](http://xxx.xxx.xxx/set.cmd?user=admin+pass=12345678+cmd=setfactory+dhcp=(0=off1=on)+confirm=factoryonly)

Example:

<http://192.168.1.100/set.cmd?user=admin+pass=12345678+cmd=setfactory+dhcp=1+confirm=factoryonly>

Response Message:

DHCP: 0

or

DHCP: 1

View Log Command

Command:

getlog+num=01~50

Format:

<http://xxx.xxx.x.xxx/set.cmd?user=admin+pass=12345678+cmd=getlog+num=01~50>

Example:

<http://192.168.1.42/set.cmd?user=admin+pass=12345678+cmd=getversion>

Log No. 1 Newest Log

Log No. 50 Oldest Log

Response Message:

Sample Log:

Power1:ON

Power2:ON

Power3:OFF

Power4:OFF

Power5:OFF

Power6:OFF

Power7:OFF

Power8:ON

Socket1:TurnOn

Socket2:TurnOn

Socket3:TurnOff

Socket4:TurnOff
Socket5:TurnOff
Socket6:TurnOff
Socket7:TurnOff
Socket8:TurnOn
LogNO.1 PortState:83-PortAct:ffTime:2008-12-16 17:02:54

What this log shows:

Status of Powers 1-8
Status of Sockets 1-8
Log NO.1

Power: Represents the current status of the outlets.


Sockets: Represents the last changed status of the outlets.

Serial Com (RS-232) Control


Com1

The Com1 allows you to read the status of the 9258 DS. Information can be extracted through this port like an output

- 1.) Use DB9 cable connect to the COM1 of PC and the RS232 of device
- 2.) Execute WIN program "**Hyper Terminal**" : please go to " Start" / "program" / "Accessories" / "Communications" / "Hyper Terminal" .

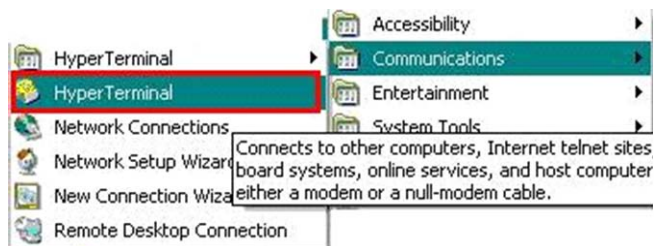

- 3.) Set the "Bits per second" as 19200 at COM1 (Must at COM1)

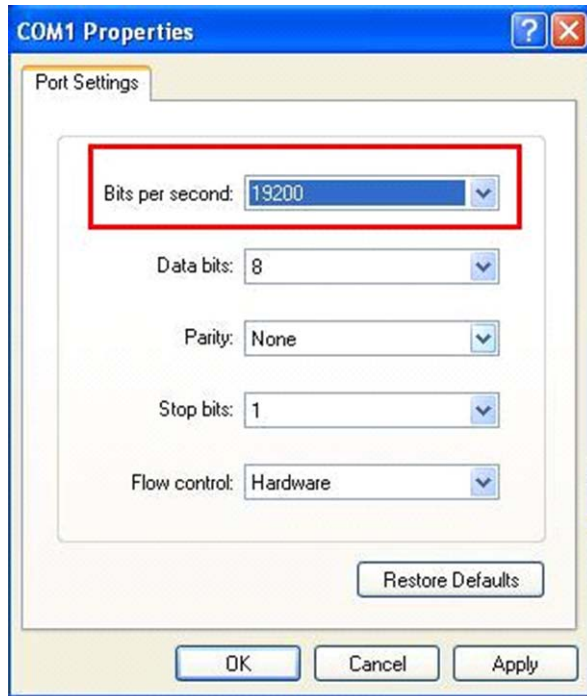

4.) Turn off the device then turn it back on and the screen will display the following information:

```

9258PRO - 超級終端機
檔案(F) 編輯(E) 檢視(V) 呼叫(C) 轉送(T) 說明(H)
rs232Dev_control.cmd_data[0]:
rs232Dev_control.cmd_data[1]:
TF33x : Uip init
=====> uIP 0.9 is running

dhcp init.....done!pingEn i:4 0 !!!!
pingEn i:5 0 !!!!
pingEn i:6 0 !!!!
pingEn i:7 0 !!!!
NTPSend OK

[***LastestUpTime:2008-12-16 13:39:46***]

===== TF-33x WebControl SDK V1.025 =====12/12/08 14:02:57

user_name:admin
password:12345678
DHCP: INIT
DHCP: INIT: option = x:0528
DHCP : DHCP Got
DHCP : IP Address. . . . . : 192.168.1.25
DHCP : Subnet Mask . . . . . : 255.255.255.0
DHCP : Default Gateway . . . . . : 192.168.1.1
DHCP : DNS Server . . . . . : 192.168.1.1

```

SNMP

Initial Setup:

- 1.) Download Net-SNMP (<http://www.net-snmp.org>) and install the software
- 2.) Once the software has been installed Register the agent
- 3.) Register the agent
- 4.) Start the service

SNMP MIB

Please restart for any changes to take effect.	
IP Address:	192 . 168 . 1 . 89 : 80
Subnet Mask:	255 . 255 . 255 . 0
Default Gateway:	192 . 168 . 1 . 1
DNS:	168 . 95 . 192 . 1
Trap IP:	192 . 168 . 1 . 253
SNMP	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
DHCP Client	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
BEEPER	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Http Command Verification	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Device Name:	IP9258PRO
Release Version:	V1.027 2009/03/13
<input type="button" value="Submit"/> <input type="button" value="Cancel"/>	

Get Status MIB

Port 1: **1.3.6.1.4.1.92.59.2.1.0**
Port 2: **1.3.6.1.4.1.92.59.2.2.0**
Port 3: **1.3.6.1.4.1.92.59.2.3.0**
Port 4: **1.3.6.1.4.1.92.59.2.4.0**
Port 5: **1.3.6.1.4.1.92.59.2.5.0**
Port 6: **1.3.6.1.4.1.92.59.2.6.0**
Port 7: **1.3.6.1.4.1.92.59.2.7.0**
Port 8: **1.3.6.1.4.1.92.59.2.8.0**

Ex: snmpget -v 1 -c public 192.168.1.96 1.3.6.1.4.1.92.59.2.1.0
Response: SNMPv2-SMI::enterprises.92.59.2.1.0 = INTEGER: 0

Integer 0 = Off Integer 1 = On

Get Voltage MIB

1.3.6.1.4.1.92.59.3.1.0

Ex: snmpget -v 1 -c public 192.168.1.96 1.3.6.1.4.1.92.59.3.1.0
Response: SNMPv2-SMI::enterprises.92.59.3.1.0 = INTEGER: 113

Get Current MIB

1.3.6.1.4.1.92.59.4.1.0

Ex: snmpget -v 1 -c public 192.168.1.96 1.3.6.1.4.1.92.59.4.1.0
Response: SNMPv2-SMI::enterprises.92.59.4.1.0 = INTEGER: 0

Get Current 2 MIB

1.3.6.1.4.1.92.59.4.2.0

Ex: snmpget -v 1 -c public 192.168.1.96 1.3.6.1.4.1.92.59.4.2.0
Response: SNMPv2-SMI::enterprises.92.59.4.2.0 = INTEGER: 0

Get Temperature MIB

1.3.6.1.4.1.92.59.5.1.0

Ex: snmpget -v 1 -c public 192.168.1.96 1.3.6.1.4.1.92.59.5.1.0
Response: SNMPv2-SMI::enterprises.92.59.5.1.0 = INTEGER: 51

Set Port MIB

1.3.6.1.4.1.92.59.2.1.0

Port 1: **1.3.6.1.4.1.92.59.2.1.0**

Port 2: **1.3.6.1.4.1.92.59.2.2.0**

Port 3: **1.3.6.1.4.1.92.59.2.3.0**

Port 4: **1.3.6.1.4.1.92.59.2.4.0**

Port 5: **1.3.6.1.4.1.92.59.2.5.0**

Port 6: **1.3.6.1.4.1.92.59.2.6.0**

Port 7: **1.3.6.1.4.1.92.59.2.7.0**

Port 8: **1.3.6.1.4.1.92.59.2.8.0**

Integer 0 = Off

Integer 1 = On

Ex: snmpset -v 1 -c public 192.168.1.96 1.3.6.1.4.1.92.59.2.1.0 integer 1
Response: SNMPv2-SMI::enterprises.92.59.2.1.0 = INTEGER: 1

10.) XML Functionality

The 9258 DS supports XML. Before you can start using it you will need to enable it by using the http command:

<http://xxx.xxx.x.xxx/Set.cmd?user=admin+pass=12345678+CMD=EnableXML>

Once the XML is enabled you should see a message that says: **EnableXML**

Once XML has been enabled to access the XML type in the command:

<http://xxx.xxx.x.xxx/info.xml>

The XML commands are listed below:

<http://xxx.xxx.x.xxx/info.xml>

<http://xxx.xxx.x.xxx/Set.cmd?user=admin+pass=12345678+CMD=EnableXML>

<http://xxx.xxx.x.xxx/Set.cmd?user=admin+pass=12345678+CMD=DisableXML>

Please view the XML output for reference.

```
<?xml version="1.0" encoding="utf-8" standalone="yes" ?>
<!DOCTYPE root (View Source for full doctype...)>
- <root>
- <Power_Information>
  - <Power_Info>
    <Power1>asdf-->ON</Power1>
    <Power2>asdf-->ON</Power2>
    <Power3>qwer-->ON</Power3>
    <Power4>qert-->ON</Power4>
    <Power5>asdf-->ON</Power5>
    <Power6>awer-->ON</Power6>
    <Power7>qwer-->ON</Power7>
    <Power8>qwer-->ON</Power8>
  </Power_Info>
- <Input_Info>
  <Voltage>106</Voltage>
  <Current1>0</Current1>
  <Current2>0</Current2>
  <Temperature>24</Temperature>
</Input_Info>
</Power_Information>
- <Product_Information>
  - <Device_Info>
    <User_Name>max9258PRO</User_Name>
    <IP_Address>192.168.1.148:80</IP_Address>
    <IP_Mask>255.255.255.0</IP_Mask>
    <IP_Gateway>192.168.1.1</IP_Gateway>
    <IP_DNS>168.95.192.1</IP_DNS>
    <IP_Mac_Address>00:92:59:12:12:01</IP_Mac_Address>
  </Device_Info>
  <Version>V1.025 2008/12/12</Version>
</Product_Information>
</root>
```

11.) Frequently Asked Questions (F.A.Q)

Q1: How do I reset the device back to manufacturer default values?

Ans: In the front panel of the 9258 DS, there is a reset feature that will reset the device back to manufacturer default settings. Take a pen or small pin, then press and hold for about 10-15 seconds. Once you hear a single “beep” sound the device will be reset back to manufacturer default

Default IP: 192.168.1.100 (When 9258 DS is connected to PC directly)

Default Login: Admin

Default Password: 12345678

Q2: What can I do if I forget my password?

Ans: In the login field enter the field

- 1.) “super user”: do not enter the quotation marks and there is a space between super and user.
- 2.) Then do not enter, a password and hit the submit button
- 3.) Unplug the device and plug it back in.
- 4.) Then use the default login and password

Default Login: admin

Default Password: 12345678

For security concern , please do power reboot 9258 in 1 minutes after click submit as type " super user " in the username as login

Q3: What is dual switch technology?

Ans: Dual Switch technology is an additional safety feature of the 9258 DS. Unlike conventional power distribution units or remote power control units the 9258 DS has a dual switch design which will completely cut off the power to the devices. Other designs which do not have this feature will may create a harmful environment that will affect the devices or the things around it. Below is a picture of

Q4: How come I cannot connect to my device from an outside network?

Ans: To use the device outside of LAN (Local Area Network. If a router is present you will have to port forward the Local IP Address of the 9258 DS so that it could be reached by the outside world. Please refer to the manual on how to accomplish this task.